



Safely connecting the world ...



Electrical Bonding Technologies

- SafeBond[®]
- PinBrazing
- SafePlug[®]

SafeBond®

The Method without
metallurgical effect to the rail




Cables can safely be attached
anywhere on the rail even on
manganese rail.

Approved and used since 2001 by:



- **Safe for the rail – No metallurgical effects**
- **Cables can be attached anywhere on the rail**
- **Silver brazing method ensure:**
 - *Lowest possible transition resistance, 5 micro Ω*
- **Low melting temperature, 650°C (1200°F)**
- **Broken Rail Detection**

- **Fast method**
- **Brazing method!**

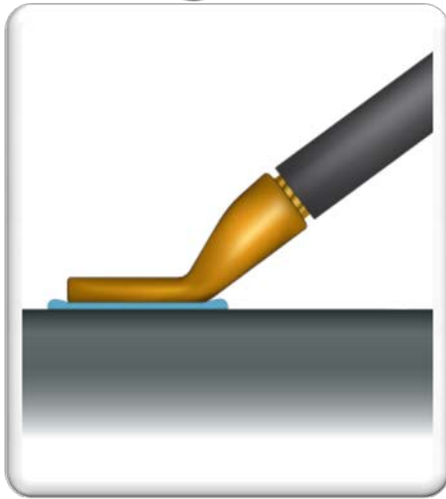

Not welding!



- **Does not melt or mix the steel and copper
the only melting material is the brazing
material**

PinBrazing

- Melting temperature of the solder material, 650°C
- The electric arc is between the Brazing pin and the Rail.
- Cable lug with a hole in it.
- The Brazing pin has solder material and flux powder inside.

SafeBond®

- Melting temperature of the solder material, 650°C
- The electric arc is between the Brazing pin and top of the Cable lug.
- Cable lug is solid with no hole.

PinBrazing

- The brazing flux and solder material are transported by the electric arc from the electrode to the brazing area.
- The tip of the Brazing pin is inserted in the hole of the cable lug and becomes an integrated part of the connection.
- The Method used since 1955.
More than 70 Million brazings.


SafeBond®

- The cable lug is equipped with solder material. Brazing flux is added manually before brazing.
- The brazing flux and solder material is positioned in the brazing area before the electric arc operation starts.
- The electrode does not become a part of the connection.
- Used since 2000.
More than 1 Million connections.



Safely connecting the world ...

SafeBond®

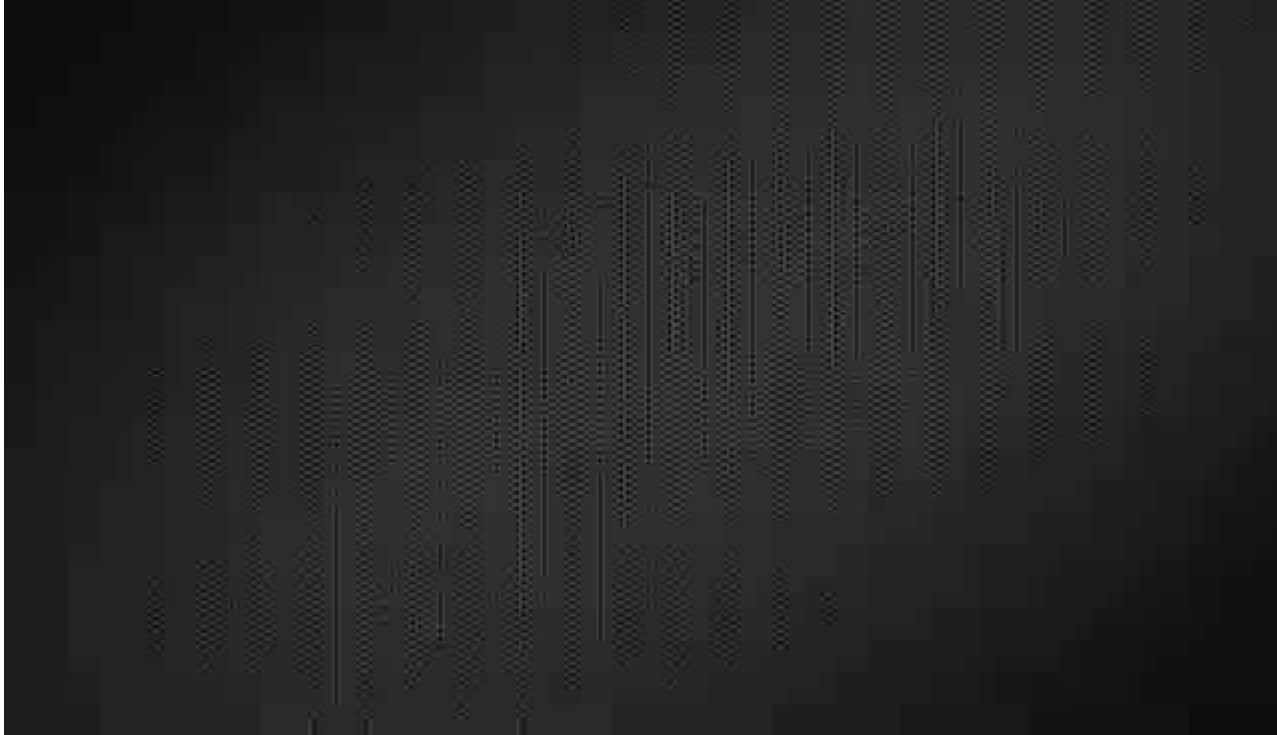

1. Grinding



2. Apply Flux on braze area




3. Apply Flux on top of lug




4. Insert the Electrode and Ferrule in the Gun



5. Pull the trigger

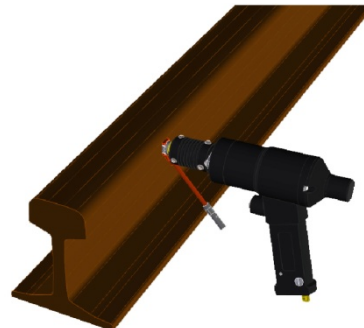

6. Eject the electrode from gun. Ready.

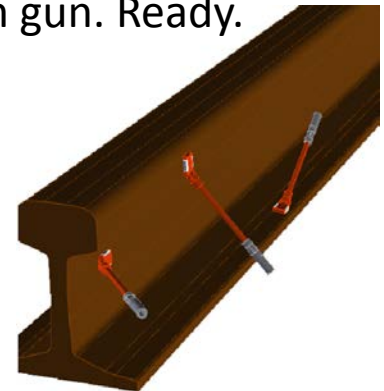


Econnect can be used for
both SafeBond and
PinBrazing (Different guns)




ECO NECT

SafeBond®

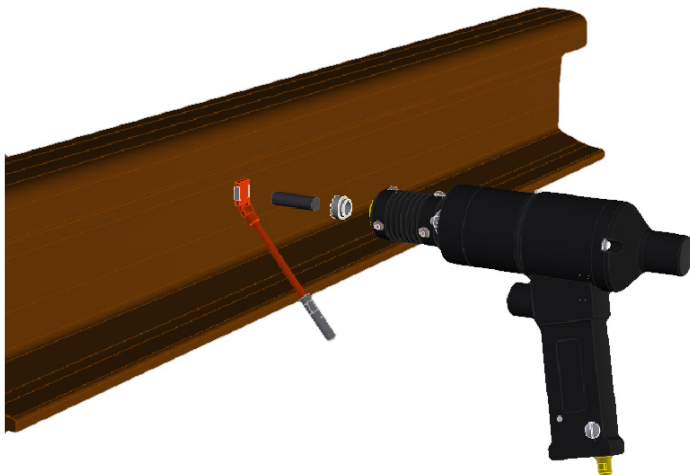

PinBrazing


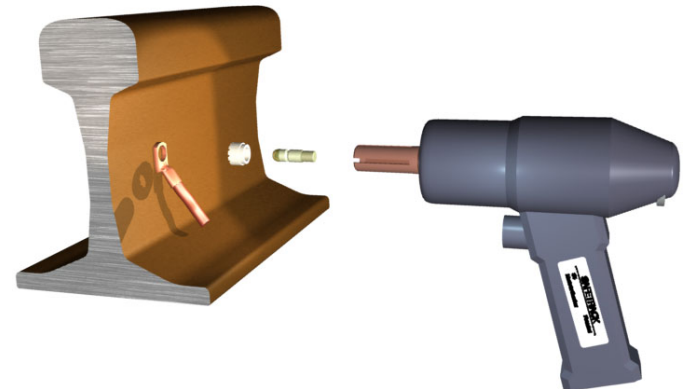


Important! Broken Rail Detection Feature

Safely connecting the world ...

A drilled connection will continue to give a clear signal even if the rail is broken

(Broken rails often occur from drilled holes)

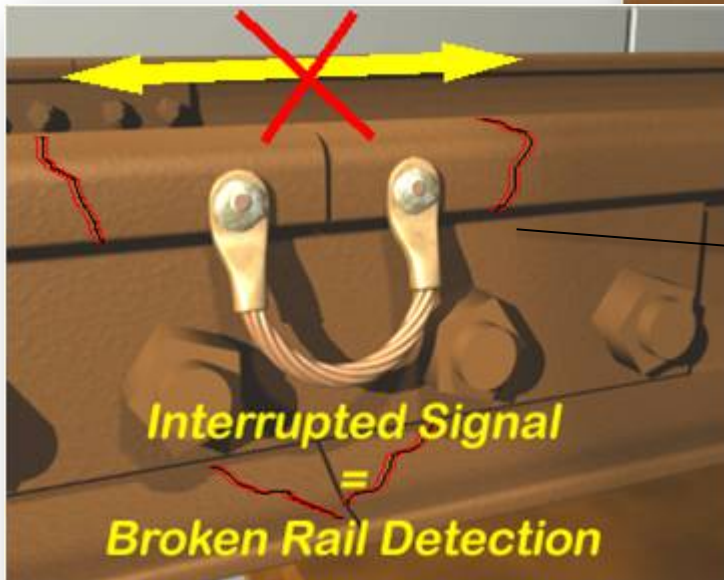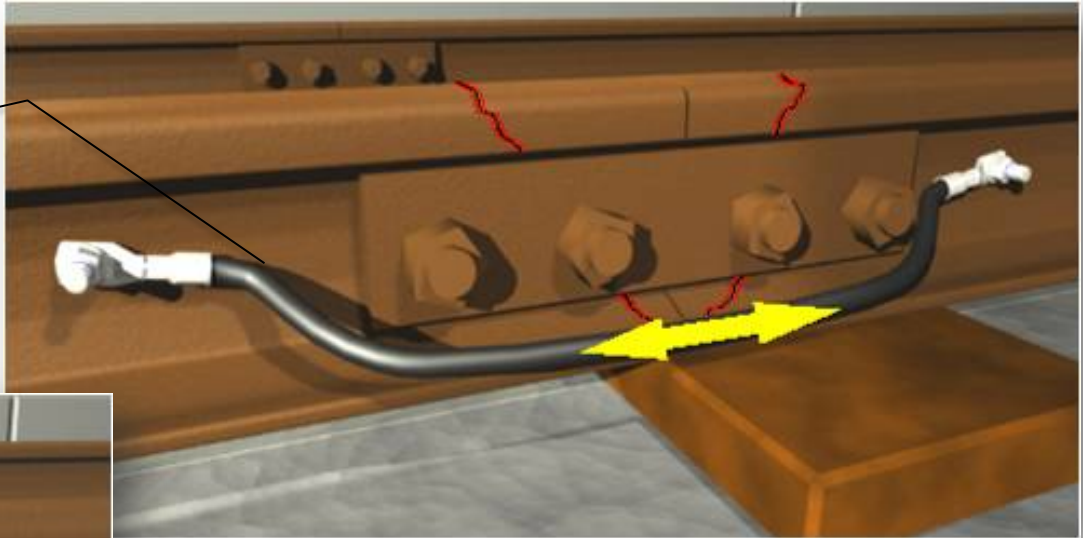


A SafeBonded or PinBrazed Rail Bond on the head of the rail will give an interrupted signal if the rail is broken in the joint

An accident can be prevented!

Advantages of Broken Rail Detection

Safely connecting the world ...

Devastating results of broken rails due to drilled holes in the web of the rail.

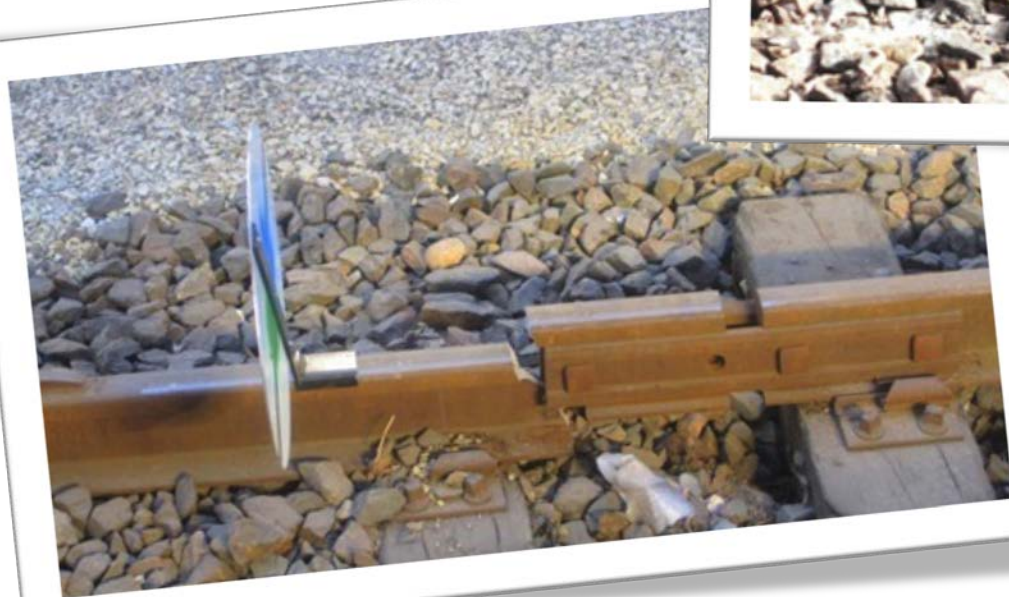

Metallurgical Test

KOCKUMS

RAPPORT

utfärdad av ackrediterat laboratorium
REPORT issued by an Accredited Laboratory



Författare / Report by
John Ivarsson

Datum / Date

04-02-05

Reg.nr / Reg. no

16/51/14656

Sidnr / Page

2(3)

Sektion / Section

Hållfasthetsprovning

Mechanical testing

Medarbetare / Assistants

Brazed test peaces were delivered To Kockums Laboratory for hardness tests and metallographic examination.

The hardness test were carried out according to Vickers,HV1. The uncertainty of the measured values are estimated to $\pm 3\%$

Mark; SB50-S90

Distance from fusion line,mm

Hardness,HV1

0,14

271

0,22

269

0,41

281

0,95

288

Base material

288

No transformed zone was found.

No metal penetration

Laboratoriet ackrediteras av Styrelsen för ackreditering och teknisk kontroll (SWEDAC) enligt svensk lag. Verksamheten vill de svenska ackrediterade laboratorier uppfylla kraven i ISO/IEC 17025.
Lämnas rapport för ändring åligger i sin helhet om inte SWEDAC och utfärdande laboratorium i förväg skriftligen godkännt.
Laboratoriet är ackrediterat av Styrelsen för ackreditering och teknisk kontroll (SWEDAC) enligt svensk lag. Verksamheten vill de svenska ackrediterade laboratorier uppfylla kraven i ISO/IEC 17025.
The report may not be reproduced other than in full, except with the prior written approval of SWEDAC and the issuing laboratory.

KOCKUMS

RAPPORT

utfärdad av ackrediterat laboratorium
REPORT issued by an Accredited Laboratory



Författare / Report by
John Ivarsson

Datum / Date

04-02-05

Reg.nr / Reg. no

16/51/14656

Sidnr / Page

3(3)

Sektion / Section

Hållfasthetsprovning

Mechanical testing

Medarbetare / Assistants

Picture 1
Scale X 9
Etched in NITAL



Underskrift av den som gjort provningen / Signature of person responsible for testing

Godkänd / Approved



Laboratoriet ackrediteras av Styrelsen för ackreditering och teknisk kontroll (SWEDAC) enligt svensk lag. Verksamheten vill de svenska ackrediterade laboratorier uppfylla kraven i ISO/IEC 17025.
Lämnas rapport för ändring åligger i sin helhet om inte SWEDAC och utfärdande laboratorium i förväg skriftligen godkännt.
Laboratoriet är ackrediterat av Styrelsen för ackreditering och teknisk kontroll (SWEDAC) enligt svensk lag. Verksamheten vill de svenska ackrediterade laboratorier uppfylla kraven i ISO/IEC 17025.
The report may not be reproduced other than in full, except with the prior written approval of SWEDAC and the issuing laboratory.

Consumables

Comes in cpl. pack including:

- Rail Bond
- Braze Electrode
- Ceramic Ferrule



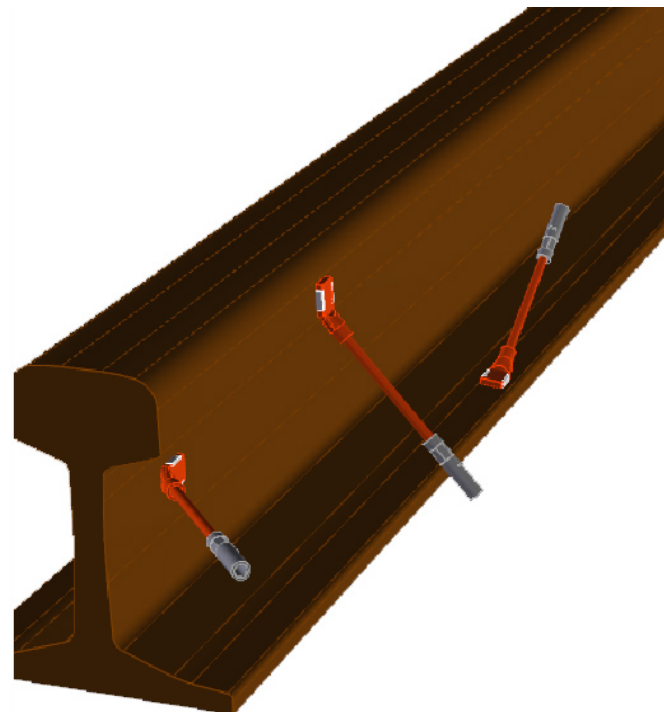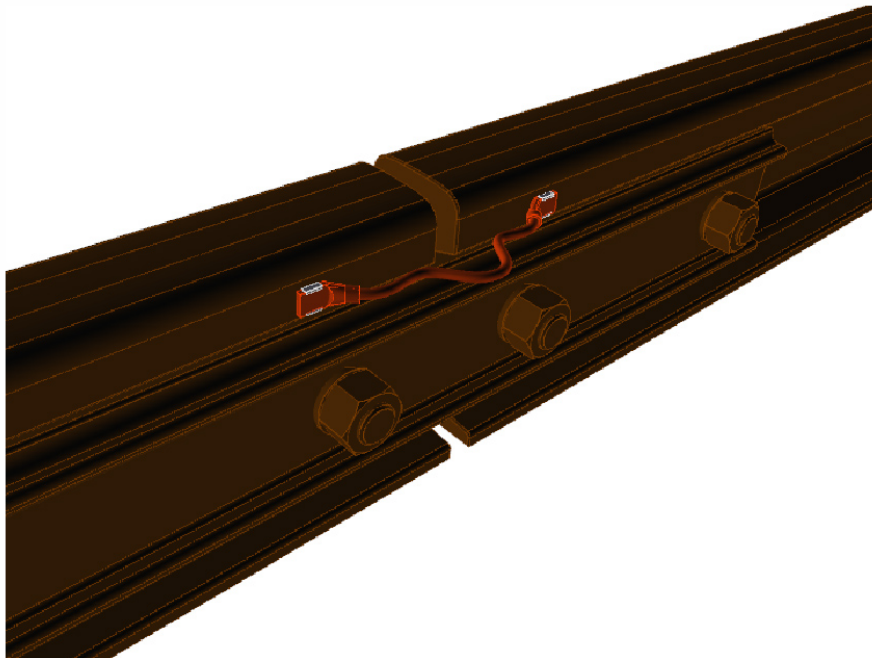




ECONECT

- Brazing Capacity: 50 PinBrazings or 25 SafeBonds per charge
- Li-Ion Battery. Nano technology, Patent
- Recharged in 2h
- Constant Energy Control System. Patent
- Automatic Brazing Gun included. Patent
- Internal Battery Pre heater included
- Grinder included
- Tool Case included
- Grounding Device included
- System Voltage: 36V DC
- Weight: 9,8 kg



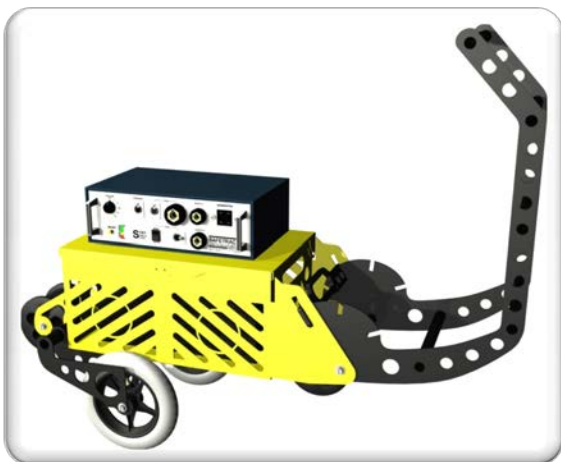

SB101

- Brazing Capacity: 50-60 SafeBond® per charge
- Recharged in 8-10h
- Constant Energy Control System. Patent
- Automatic Brazing Gun included. Patent
- Grinder included
- Grounding Device included
- System Voltage: 36V DC
- Weight: 50 kg



X250

- Brazing Capacity: 400 PinBrazings or 200 SafeBonds per charge or continuously connected to the mains
- Constant Energy Control System. Patent
- Automatic Brazing Gun included. Patent
- Built in Battery Charger
- Grinder included
- Grounding Device included
- System Voltage: 36V DC
- Weight: 74,5 kg

Used by:

Union Pacific

LB Foster

Nortrak

Meridian Rail



Comparision between Methods

Method	Time	Strength	Transition resistance	Metallurgical	Environment	Operator safety	Weather	Optical control	Flexibility	Total economy	TOTAL	Place
SafeBond®	5	5	5	5	4	5	5	5	5	4	48	1
PinBrazing	5	5	5	3	4	5	5	5	5	5	47	2
Electro welding	4	5	5	1	2	2	3	5	5	5	37	3
Propan brazing	1	5	5	4	5	3	3	5	5	1	36	4
Drilling	2	5	2	5	3	4	5	1	1	2	30	5
Thermit welding	3	4	5	2	1	1	1	5	3	4	29	6


Safetrack's judgement over methods

PinBrazing



PinBrazing


- Used since 1950
- RailBonds available in:
 - Annealed Galvanized Steel
 - **SafeCable**©

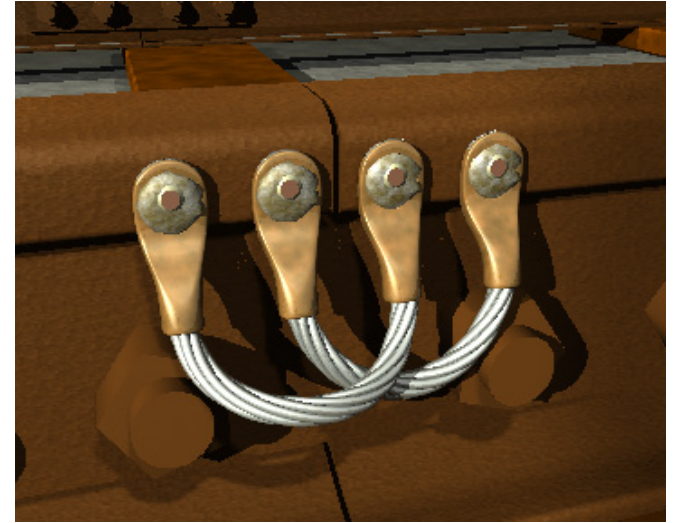


SafePlug[®]



SafePlug®

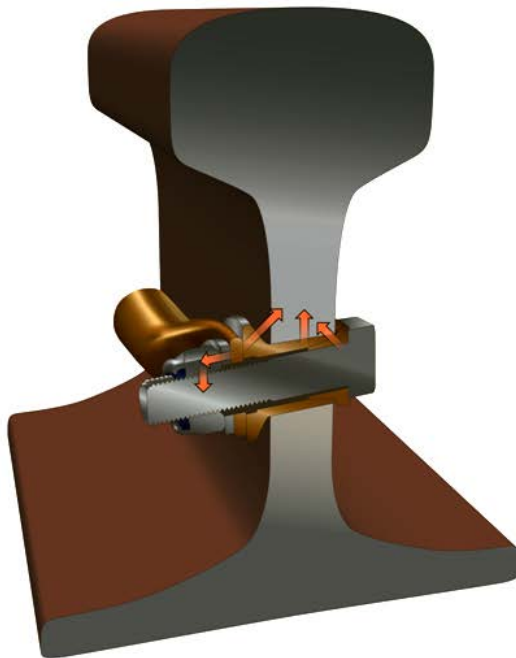

Single cable lug

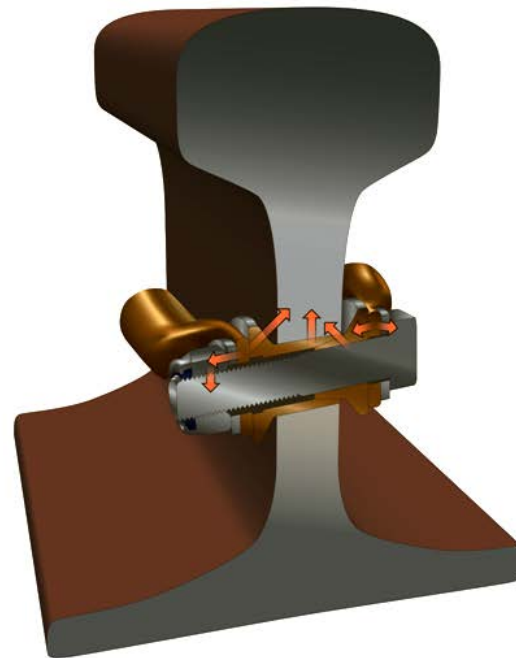

Double cable lugs (Twin)

→ = electric flow



Safely connecting the world ...

SafePlug®

SafePlug[®]




Testad av NEFI High Power Laboratory (ABB)

27.000A under 1 sek
68.000A Peakvärde
2.000.000 cykels utmattningstestad


Godkänd av:

Jernbaneverket	Norge
VR	Finland
ÖBB	Österrike
TCDD	Turkiet
Göteborgs spårvägar	Sverige


TCOD & Temporary Bonds

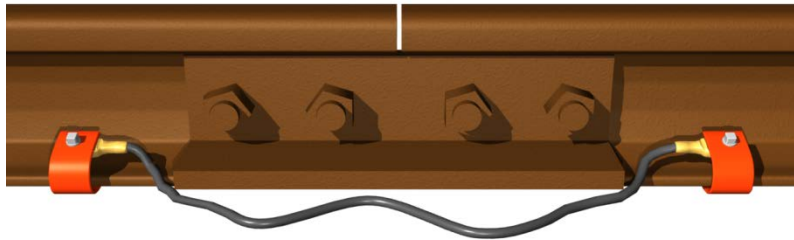

Used and approved by:

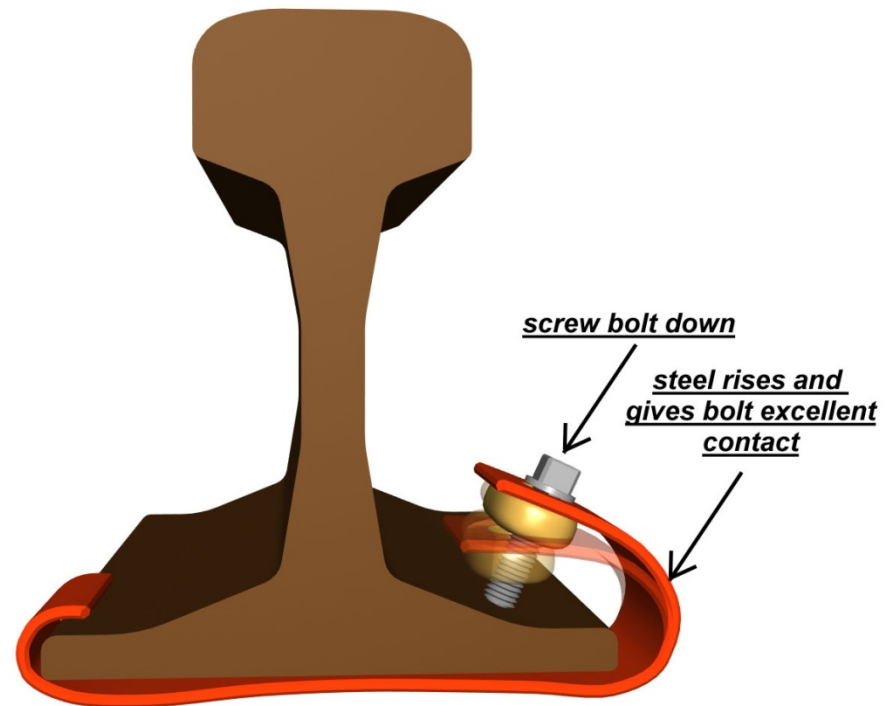

Shunting Devices

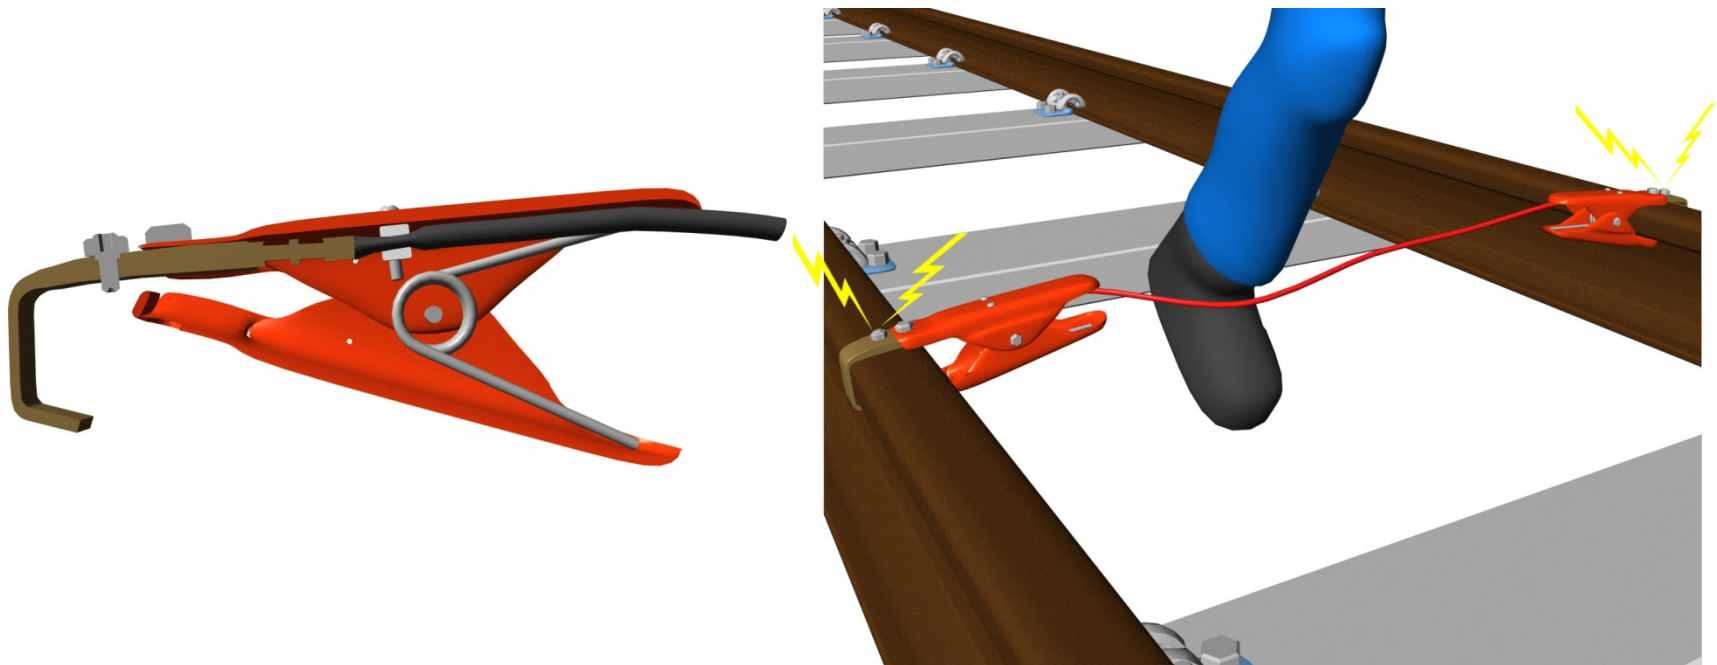


SAFECABLE

The Theft Deterrent Cable



SAFECABLE

The Theft Deterrent Cable | Den stöldförebyggande kabeln

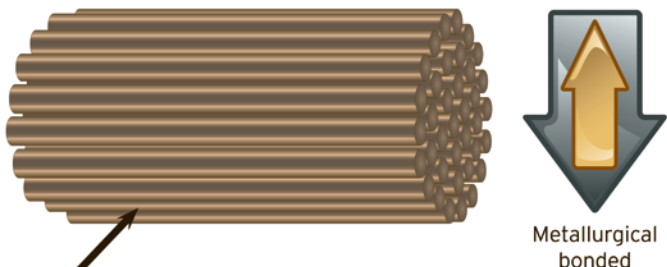

Copper and soft annealed steel

The unique SafeCable is made of soft annealed steel and copper wires to withstand vibrations in the rail and to make it as flexible as possible. The steel and copper are metallurgical bonded together. The electrical conductivity is 55% of the same size of a copper cable.

The cable is magnetic which means that thieves who check with magnets for copper avoid stealing the cable but if they anyway try to cut it they find it hard to cut and a great disappointment waiting for them at the recycling companies. The cable has no scrap value!

Railbonds for PinBrazing can be made in different



Den unika SafeCable-kabeln är gjord av mjukglödgad stålwire och koppar för att motstå vibrationer i rälen och för att vara så flexibel som möjligt. Stålet och kopparn är molekylärt sammanbundet. Den elektriska ledningsförmågan är mer än 55% av motsvarande koparkabel.

Kabeln är magnetisk vilket gör att tjuvar som kontrollerar med magneter efter koppar undviker att stjäla kabeln. Försöker ändå tjuvarna att klippa den upptäcker de att den är mycket svårklippt och på återvinningsföretagen väntar ytterligare en besvikelse. Den saknar skrotvärde!

Förbindningar för Pinnlödning kan göras i olika

Catenary Systems

KRUCH






KRUCH

Catenary Systems

Catenary Systems

KRUCH

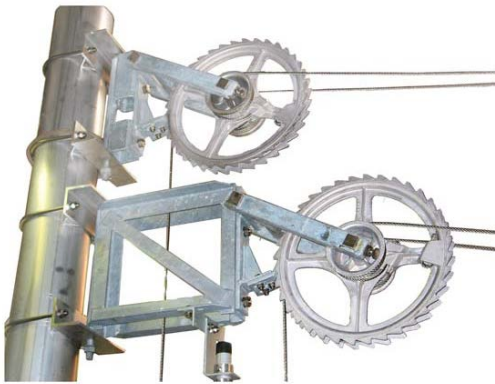


Flexible gliding hanger for lowered catenary cables

Hanger without Thimble






Cable Crimping System

High quality systems for electrical connections

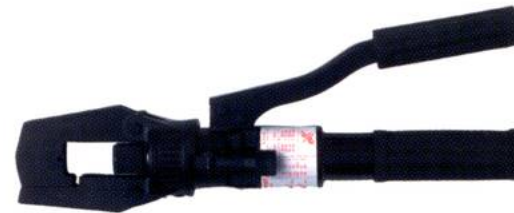

Rail Heating

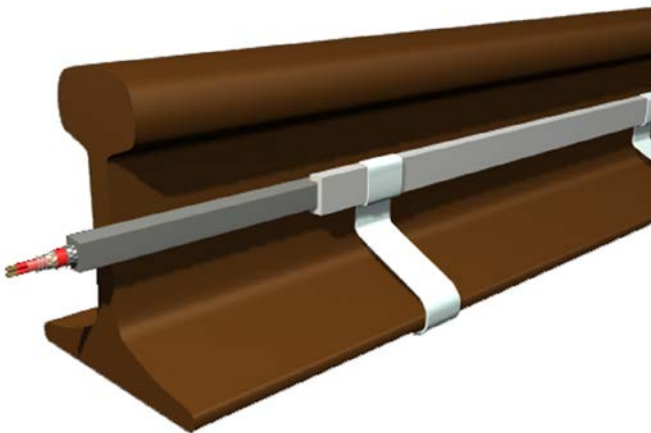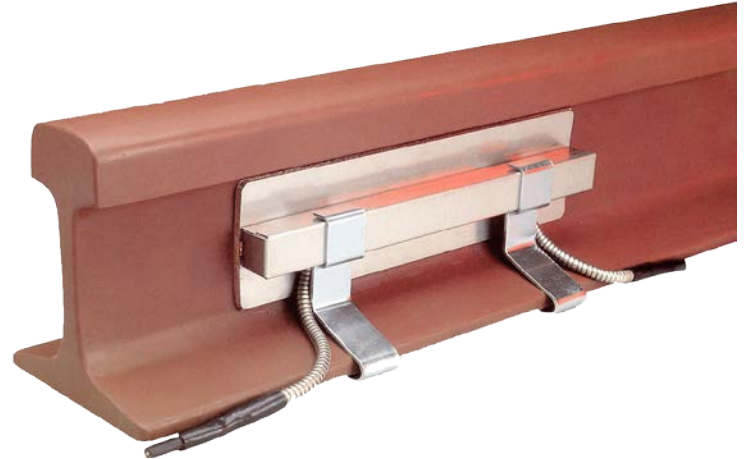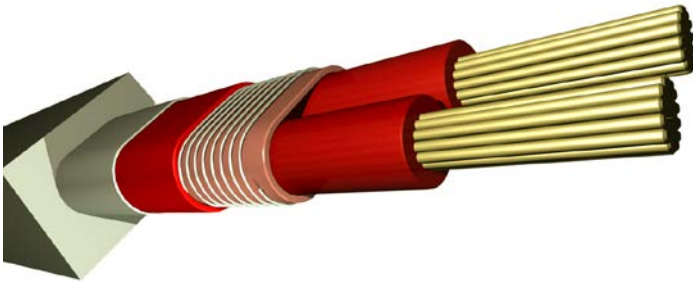

Rail Heating



Welding Modules



Welding Modules



Welding Modules



Welding Accessories



Work Tents




Trolleys





Trolleys



Rail Instruments

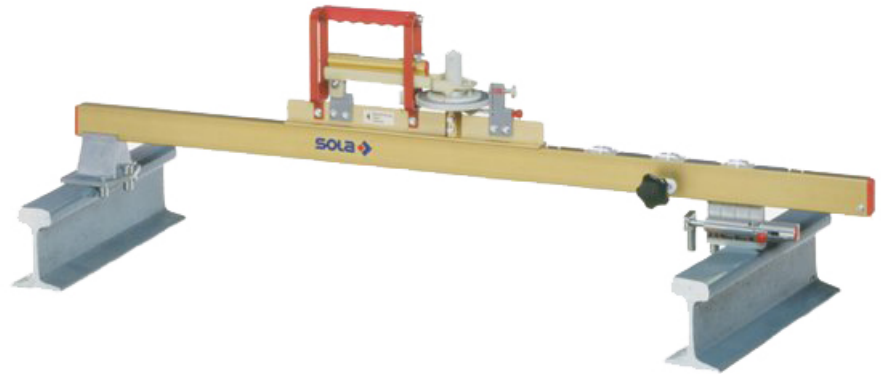

Rail Tools

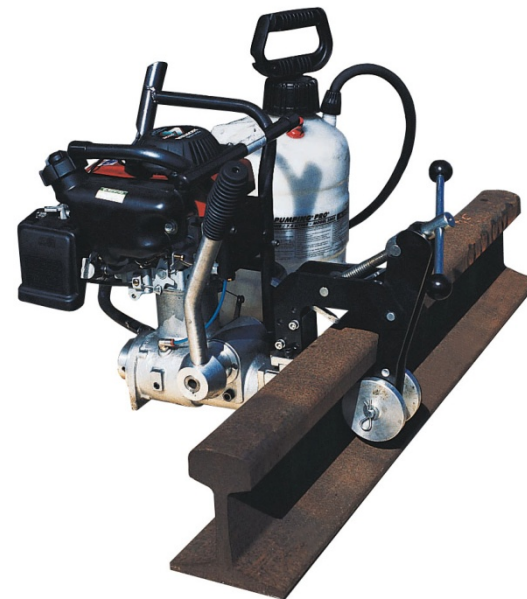

Heavy Duty Switch Brooms



Safety Equipment



Lightings





Safely connecting the world ...

www.safetrack.se