

MM-153-04

Rail Scooter



- Weight: less than 12 kg. Just carry it under your arm. Easy to lift off the rail.
- Can be separated into three pieces by hand. Assembly time less than a minute. No screws or nuts.
- Insulated rail wheels.
- Reversible.

Our Scooter allows you to bring smaller items (measuring tools) with you to the work site along the track. Transport yourself about 3 times faster than you are used to – with no impact on the environment. The greatest advantage of the rail-mounted transporter is that when moving forward, the user does not have to walk in the gravel or between the sleepers and that the distance meter displays the precise position. Particularly suitable for inspections and field work, makes it easier to reach work areas which cannot be approached by car or if access to the rails is required for other reasons. Completely new design with parking brake etc.

Track gauge 1435 mm

SAFE 96252 Incl. Distance meter & basket
SAFE 96252b Excl. Distance meter & basket

Track gauge 1520–1524 mm

SAFE 96262 Incl. Distance meter & basket
SAFE 96262b Excl. Distance meter & basket

Load Scooter



- Weight: 30 kg. Fits easily in any car. Easy to lift off the rail.
- Total load: 225 kg (including operator)
- Loading area 0,8 m²
- Raised for passing points and road crossing
- Can be separated into three pieces by hand. Assembly time less than a minute. No screws or nuts.
- Insulated rail wheels.
- Reversible.

Our Load Scooter will transport yourself and your tools about 3 times faster than you are used to! The greatest advantage of the rail-mounted transporter is that when moving forward, the user does not have to walk in the gravel or between the sleepers. Particularly suitable for inspections and field work, makes it easier to reach work areas which cannot be approached by car or if access to the rails is required for other reasons. New and improved design!

Track gauge 1435 mm

SAFE 9620LS

Track gauge 1520–1524 mm

SAFE 96206LS

Mini Trolley



- Weight: 19,5 kg. Fits easily in any car. Easy to lift off the rail.
- Total load: 350 kg
- Load platform 915 x 666 mm
- Raised for passing points and road crossing
- Can be separated into three pieces by hand. Assembly time less than a minute. No screws or nuts.
- Insulated rail wheels.
- Parking brake
- Reversible.

Our Mini Trolley allows for a total load of 350 kg. Particularly suitable for inspections and field work, makes it easier to reach work areas which cannot be approached by car or if access to the rails is required for other reasons. Exclusive design with parking brake.

Track gauge 1435 – 1524 mm (adjustable)


SAFE 966410



MM-153-04

Accessories for Rail Scooter

Loading area (fits PinBrazing units S30/ECONNECT
Part no. 9630

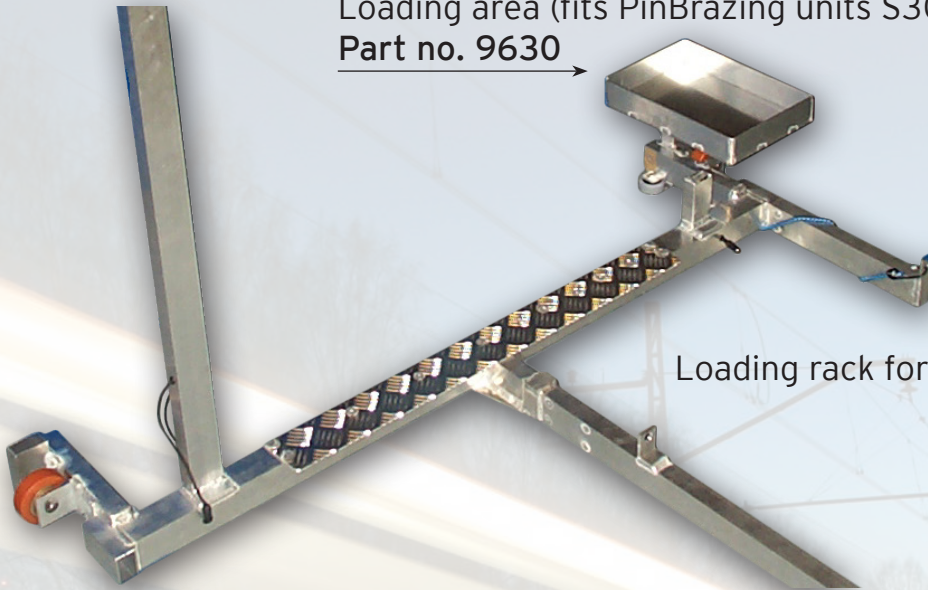


Part no. 9628
Loading rack for long instruments etc



Computer mounting
Part no. 9633



Writing board
Part no. 9632

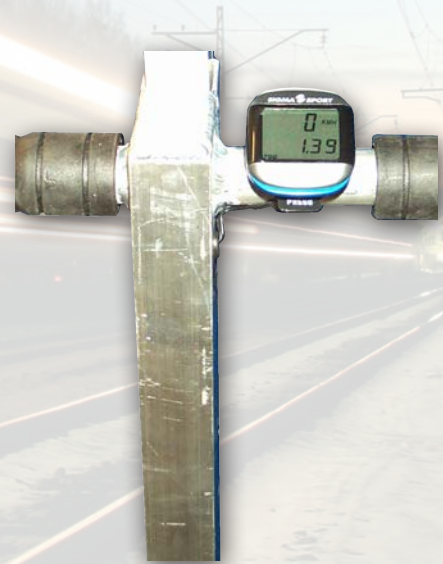

Spare distance meter
(only for 96252 & 96262)
Part no. 9627