


MM-241-01

Brazing Pins and Ferrules (with fuse wire) for Cathodic Protection installations

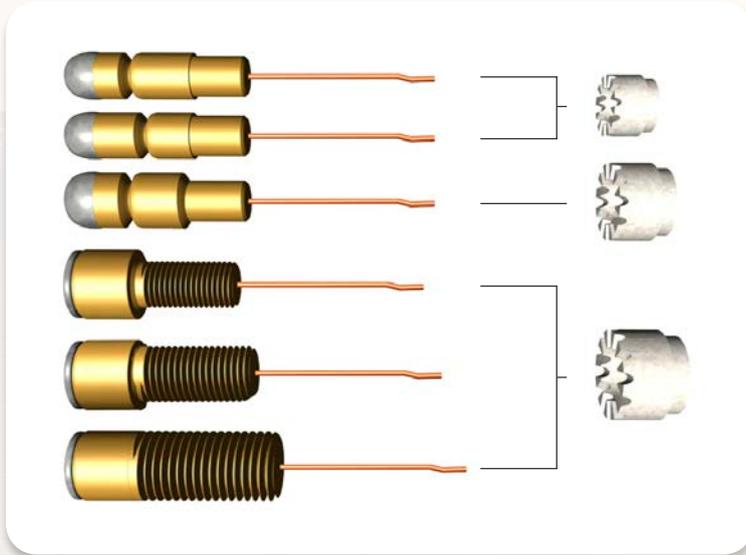

SAFE no.	Description	Dimension. L=Thread length (mm)	Qty/pack	Recommended Ceramic Ferrule	Notes
For non-electronic pinbrazing equipment (brazing pins with fusewire)					
1025	8mm Standard	Ø8mm	100	2003	
1030	8mm Extra Silver	Ø8mm	100	2003	
1019	9,5mm	Ø9,5mm	100	2009	
Threaded brazing pins for non-electronic pinbrazing equipment (metric thread)					
1038	M8 Threaded	M8, L=16mm	50	2012	Incl. 100pcs washers, 50pcs locknuts
1040	M10 Threaded	M10, L=24mm	50	2012	Incl. 50pcs spring washer, 100pcs nuts
1042	M12 Threaded	M12, L=24mm	50	2012	Incl. 50pcs spring washer, 100pcs nuts