

MM-031-12

Cable Lugs for PinBrazing


Cable Lug Kit - To be crimped to the cable

Includes 100 pcs of each

Brazing pin/Ceramic ferrule/Cable lug.

Safetrack cable lugs are specially made for PinBrazing.

Use Safetrack crimping tools to ensure adequate contact.

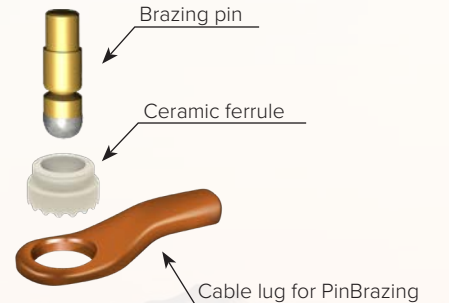

Part No.	Cable size	Ø d / D (mm)	Qty/pack	Incl. Brazing Pin + Ferrule
6056CP	10 mm ² (#7-8)	6/9	100	10051 + 2003
6057CP	Ø6/16 mm ² (#5)	6,5/9	100	10051 + 2003
6078CP	20 mm ² (#4)	7/10	100	10051 + 2003
6080CP	25 mm ² (#3-4)	8/12	100	10301 + 2003
6091CP	Ø8 mm (#1/0)	8,5/12	100	10301 + 2003
6081CP	35 mm ² (#2)	9/12	100	10301 + 2003
6079CP	50 mm ² (#1/0)	11/14	100	10301 + 2003
60847CP	70 mm ² (#2/0)	13/17	100	10191 + 2009
60683CP	110-120 mm ² (#4/0)	16/20	25	2x 10191 + 2009



For connecting smaller cable sizes use terminal sleeves and lugs as follow:


2,5 mm² (#13 AWG), use terminal sleeve 6700 + lug 6056 (10 mm² cable lug)

4,0 mm² (#11 AWG), use terminal sleeve 6701 + lug 6056

6,0 mm² (#9-10 AWG), use terminal sleeve 6702 + lug 6056

Cable Lugs- To be PinBrazed to the cable

This cable lug is both PinBrazed to the cable and to the surface. No crimping tool is needed. The cable is inserted in the lug which is flattened and the cable is then PinBrazed to the lug by placing the brazing pin in the flattened hole.

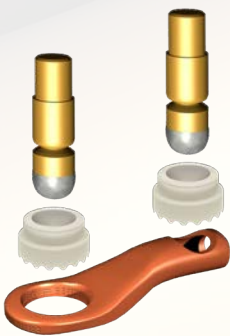

Part No.	Cable size	Qty/pack	Rec. Brazing Pin
6062	25 mm ² / ø8 mm	50	2x 10301
6063	35 mm ² / ø9 mm	50	2x 10301
6064	50 mm ² / ø11 mm	50	2x 10301
6066	AWG #3-#6	50	2x 10301
6060	AWG #3-#6 shaped for 5/8" rod	50	2x 10301